




ROD SEAL -- **SW/RS-724**

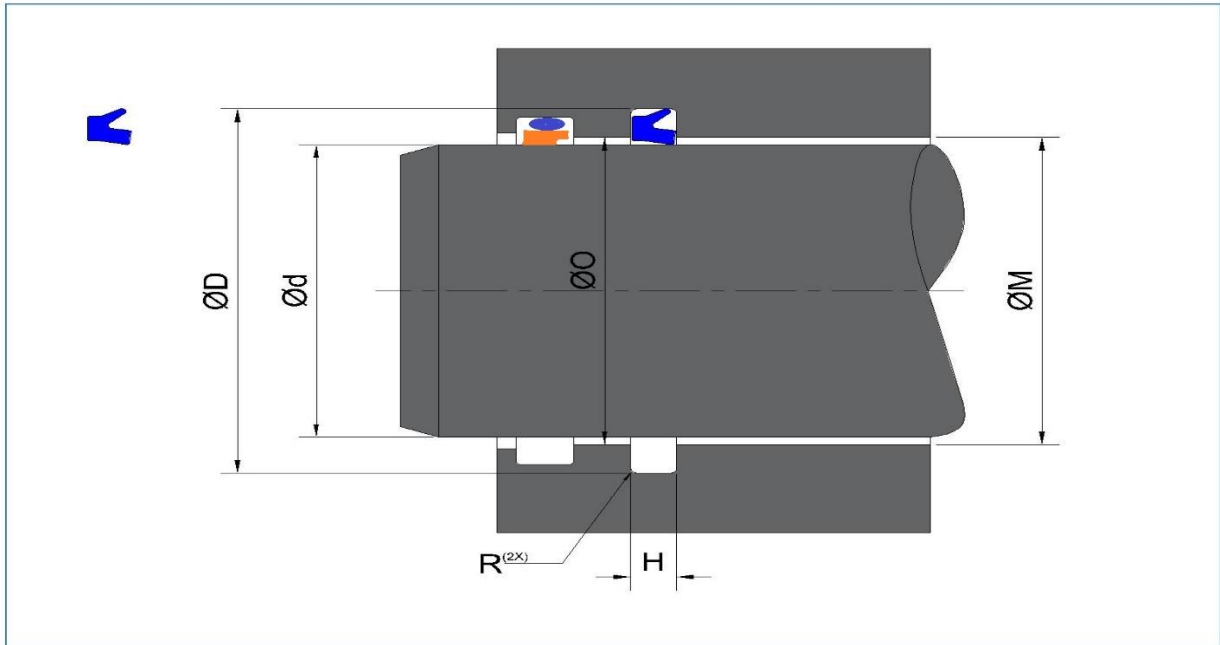

SW/RS-724 is a twin lip asymmetrical rod seal. It is recommended to use as a single Rod Seal or in combination with PTFE Rod seal- **SW/SS-701** range for best performance.

Attributes.

PRESSURE	MATERIALS	FEATURES	APPLICATIONS
3500-4000 PSI	PU	Low friction	Material handling
TEMPERATURE RANGE	Nitrile	Can withstand wide range of temperature and very effective in low temperature	Mobile Hydraulics
(50)-+250° F	Viton	Improved saleability	Medium duty cycle
VELOCITY		Longer life	Light duty cycle
3.2 Feet/Sec		Easy to install	
NB-Data on maximum and minimum values depend on specific application, such as fluid medium, surface, gap value, dynamic and static service. Pl contact SINTA, technical team for support.			

SINTA STANDARD DIMENSIONS

SL NO	ØD (H9)	Ød (f7)	H +0.25	Material Code
1	21.50	14.00	2.80	SW/RS/724/-21.5X2.8
2	25.50	18.00	2.80	SW/RS/724/-25.5X2.8
3	27.50	20.00	2.80	SW/RS/724/-27.5X2.8
4	31.00	20,00	3.90	SW/RS/724/-31X3.9
5	33.00	22.00	3.90	SW/RS/724/-33X3.9
6	32.50	25.00	2.80	SW/RS/724/-32.5X2.8
7	36.00	25.00	3.90	SW/RS/724/-36X3.9
8	32.90	25.40	2.80	SW/RS/724/-32.9X2.8
9	39.00	28.00	3.90	SW/RS/724/-39X3.9
10	41.00	30.00	3.90	SW/RS/724/-41X3.9
11	39.50	32.00	2.80	SW/RS/724/-39.5X2.8
12	43.00	32.00	3.90	SW/RS/724/-43X3.9
13	47 00	36.00	3.90	SW/RS/724/-47 00X3.9
14	51.00	40.00	3.90	SW/RS/724/-51X3.9
15	55.50	40,00	6.00	SW/RS/724/-55.5X6
16	56.00	45.00	3.90	SW/RS/724/-56X3.9
17	60.50	45.00	6.00	SW/RS/724/-60.5X6
18	61.00	50.00	3.90	SW/RS/724/-61X3.9
19	65.50	50.00	6.00	SW/RS/724/-65.5X6
20	71.50	56.00	6.00	SW/RS/724/-71.5X6
21	70.60	60.00	3.90	SW/RS/724/-70.6X3.9
22	75.50	60.00	6.00	SW/RS/724/-75.5X6
23	78.50	63.00	6.00	SW/RS/724/-78.5X6
24	76.00	65.00	3.90	SW/RS/724/-76X3.9
25	80.50	65.00	6.00	SW/RS/724/-80.5X6
26	85.50	70.00	6.00	SW/RS/724/-85.5X6
27	90.50	75.00	6.00	SW/RS/724/-90.5X6
28	95.50	80.00	6.00	SW/RS/724/-95.5X6
29	100.50	85.00	6.00	SW/RS/724/-100.5X6
30	105.50	90.00	6.00	SW/RS/724/-105.5X6
31	110.50	95.00	6.00	SW/RS/724/-110.5X6
32	115.50	100.00	6.00	SW/RS/724/-115.5X6
33	125.50	110.00	6.00	SW/RS/724/-125.5X6
34	140.50	125.00	6.00	SW/RS/724/-140.5X6
35	145.50	130.00	6.00	SW/RS/724/-145.5X6
36	155.50	140.00	6.00	SW/RS/724/-155.5X6
37	175.50	160.00	6.00	SW/RS/724/-175.5X6

